




# Sea Ice Thickness from Altimetry



**Eero.Rinne@fmi.fi**

**Rachel.Tilling.12@ucl.ac.uk**

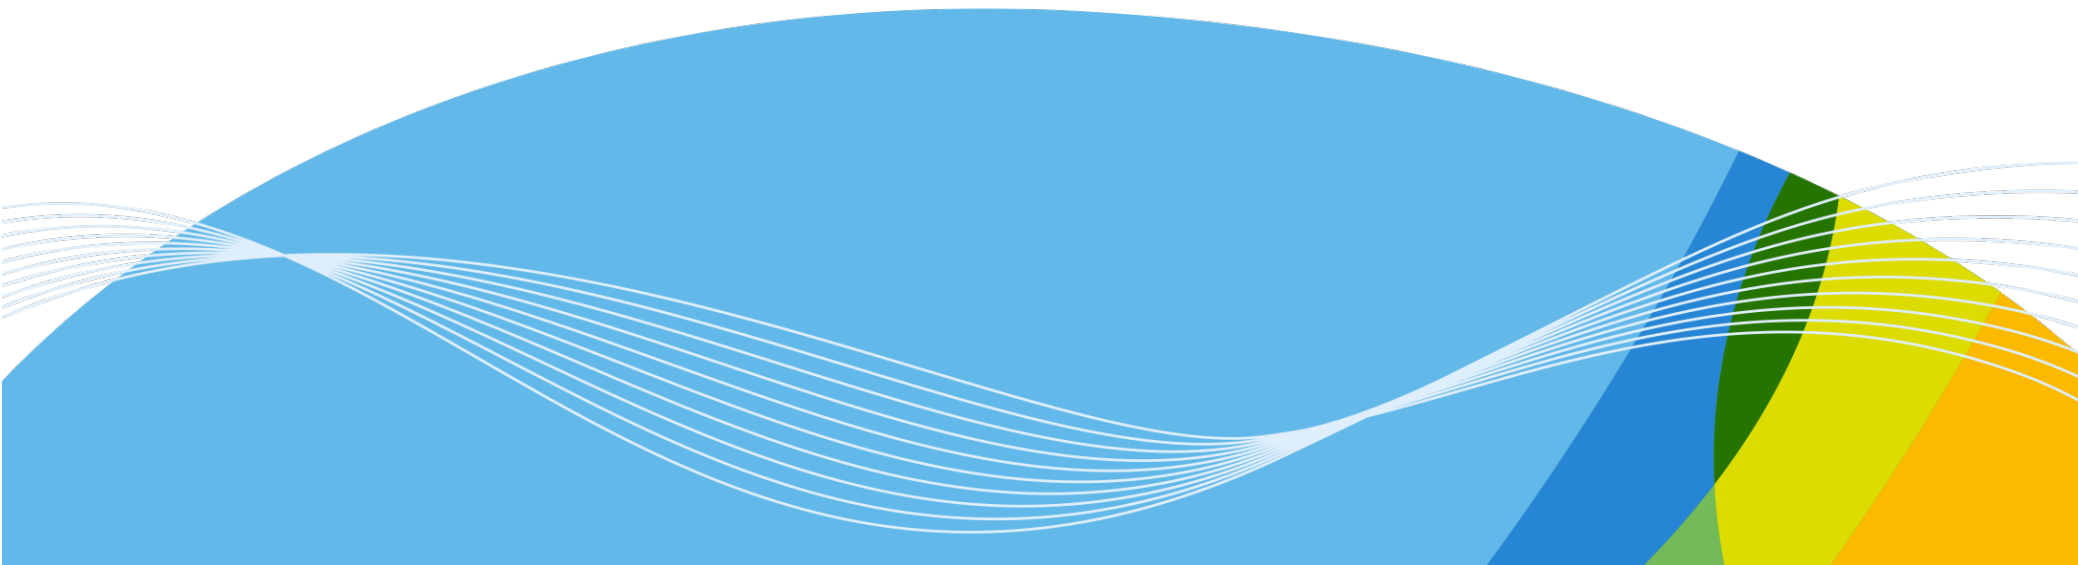



# From waveforms to SIT maps

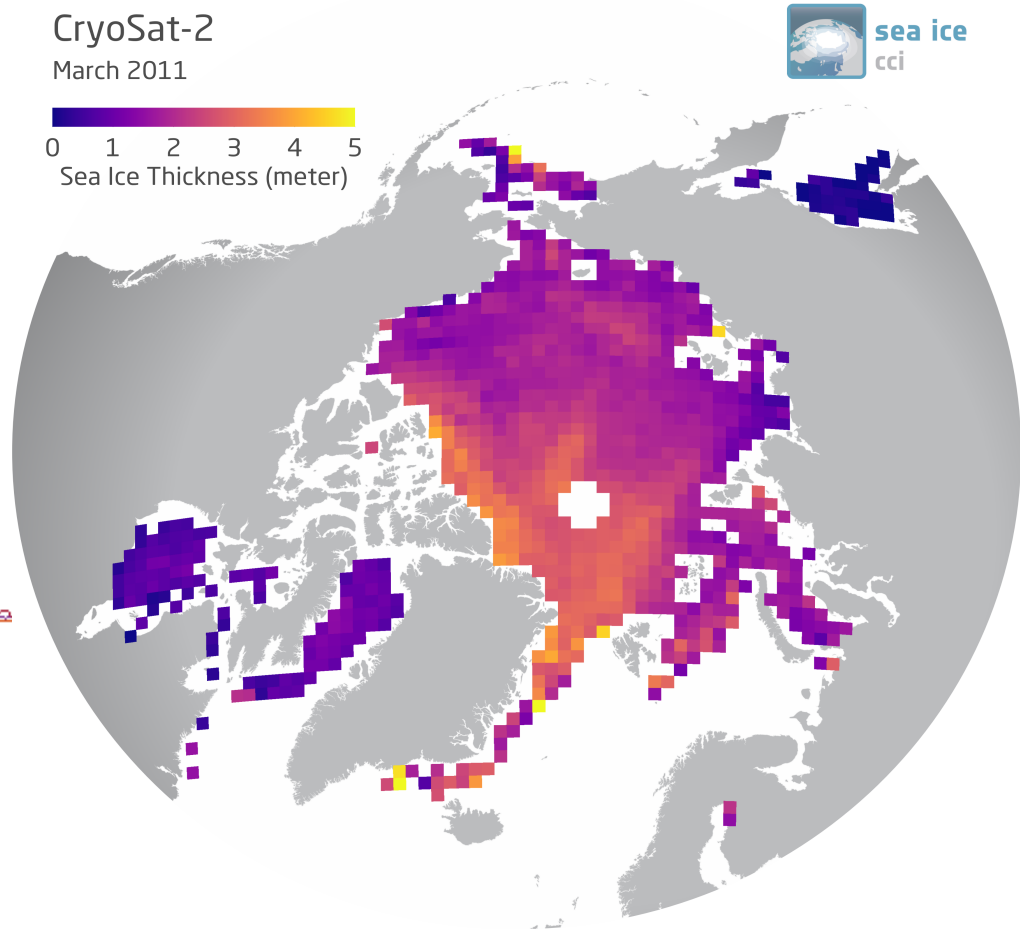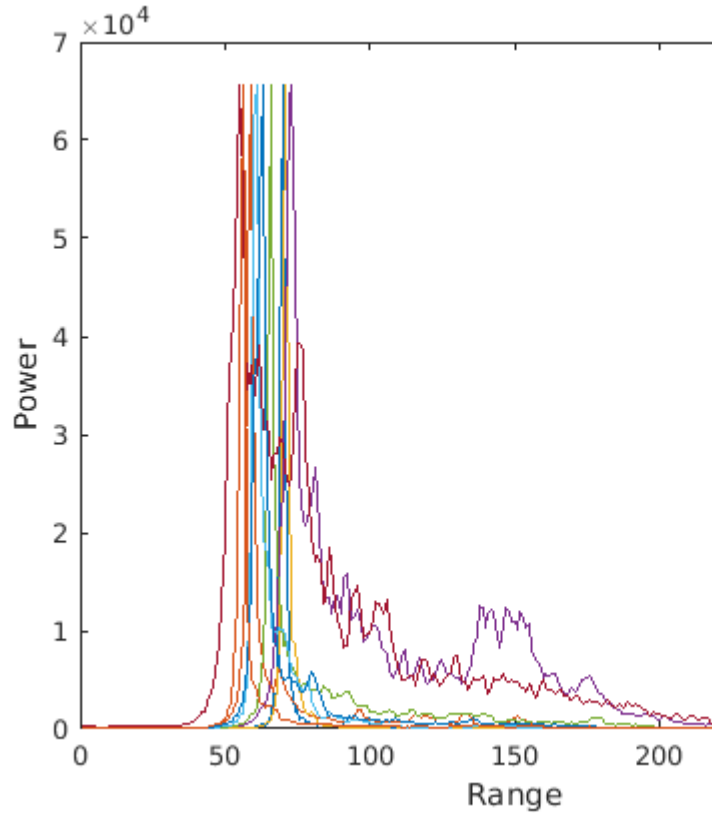



# From SIT maps to time series



CryoSat-2

March 2011




sea ice  
cci

0 1 2 3 4 5  
Sea Ice Thickness (meter)

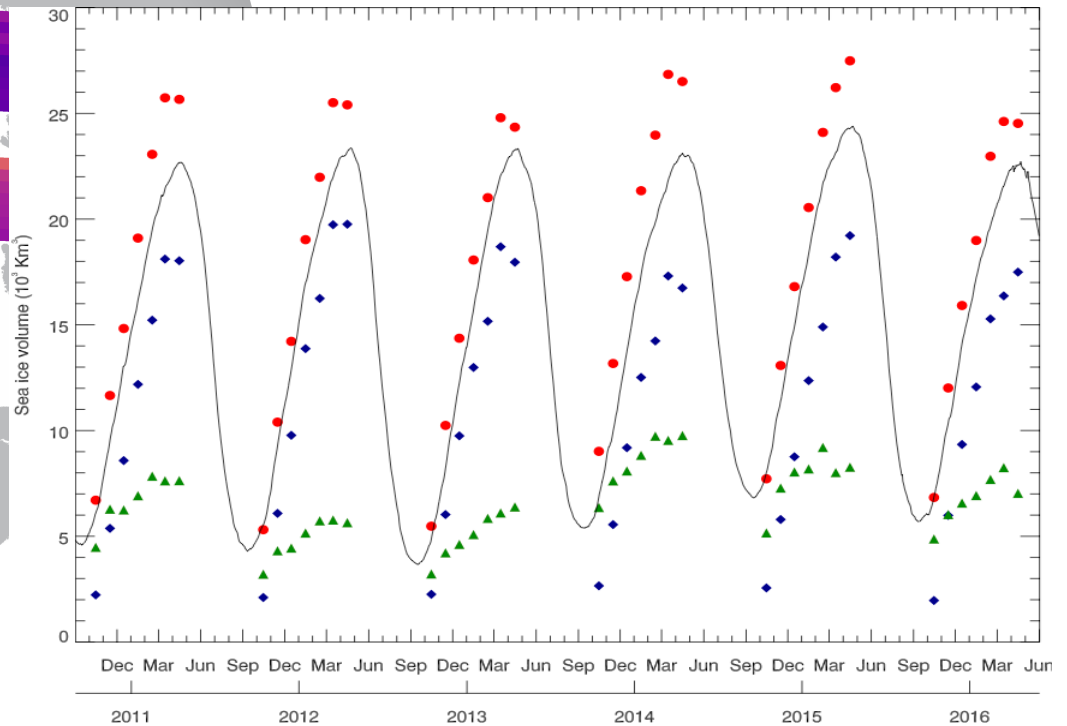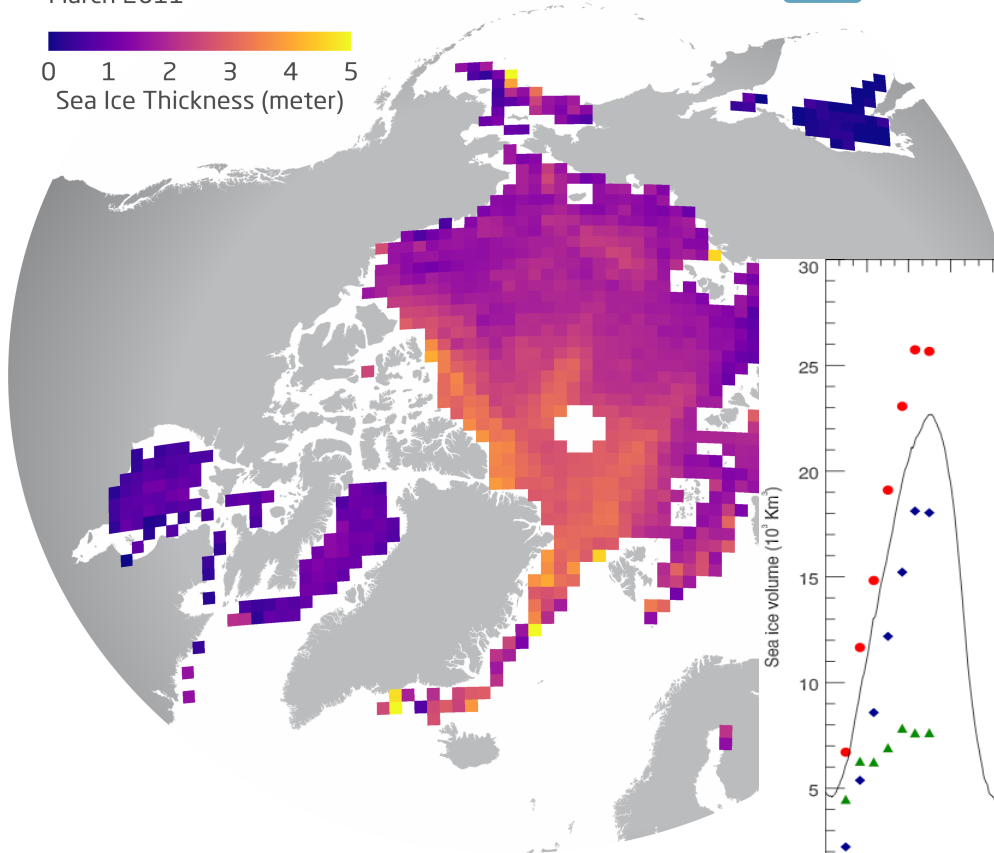



# The interesting stuff!

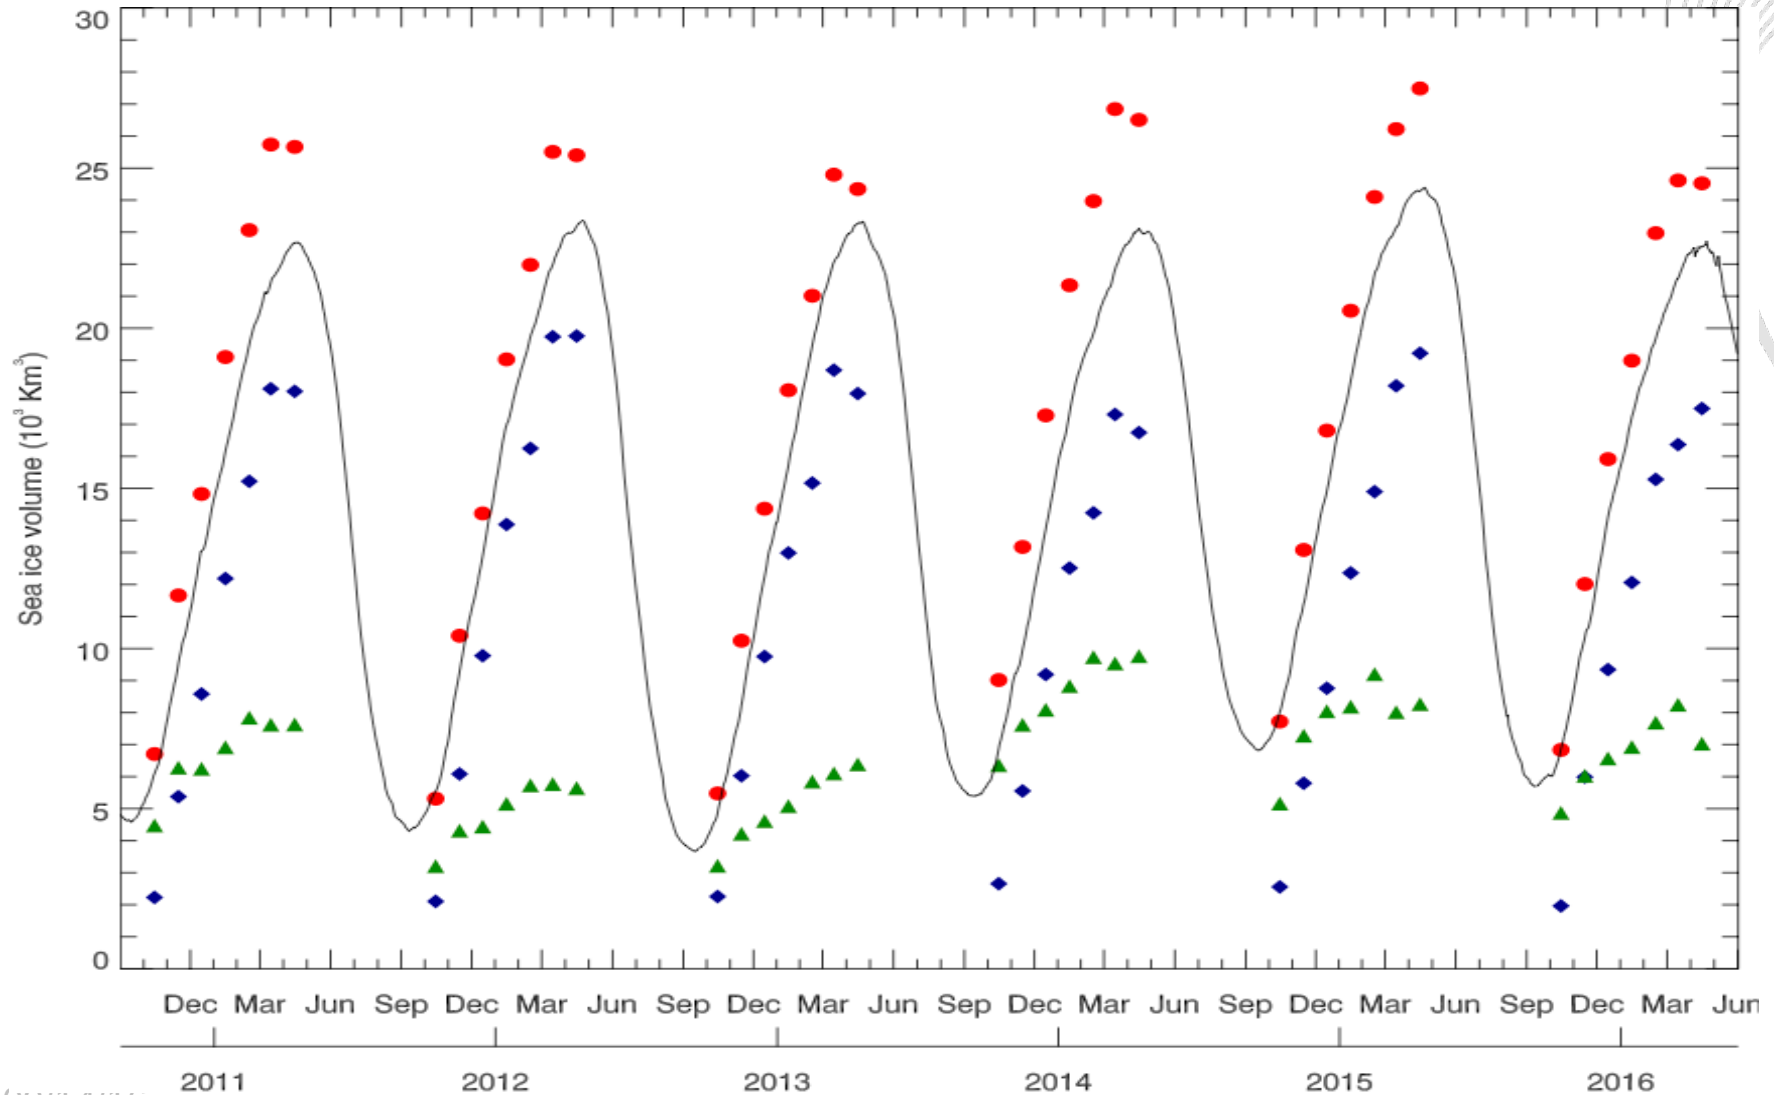




# Bit of vocabulary

- Sea ice = Frozen seawater (will taste saline if you lick it)
- Fb = Freeboard = “Height of the tip of an iceberg”
- Floe (also, ice floe) = Piece of sea ice floating in sea
- Lead = An ice free area between floes
- Open water (also, open ocean) = Sea area with no sea ice



# Basic idea


- *We measure the elevation difference between the ice and water (freeboard).*
- Detect echoes from ice floes and leads
- Fit a surface to leads to interpolate water level
- Use Archimedes principle

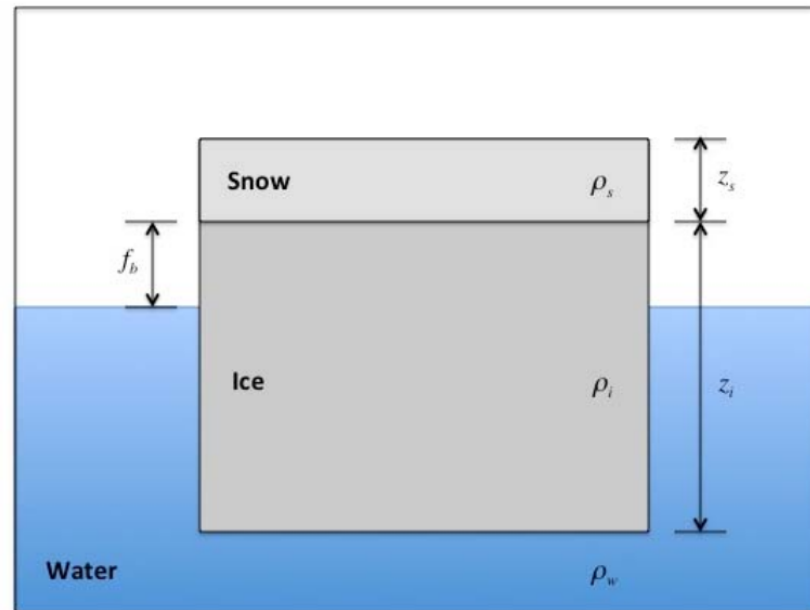

Source: ESA CCI Sea Ice / ATBD



# “The flowchart”

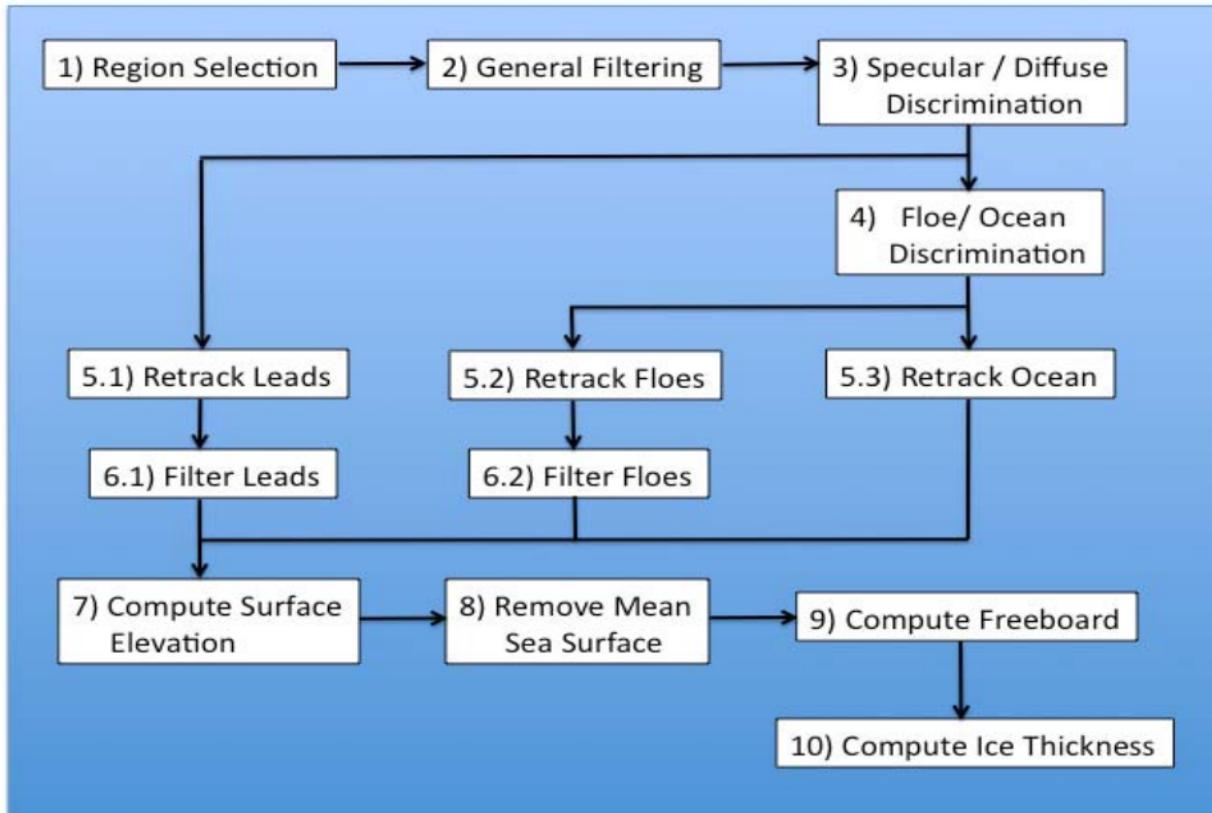


**Figure 2-2: Flow chart for the Sea Ice Thickness Processor**

Source: ESA CCI Sea Ice / ATBD



# “The flowchart”

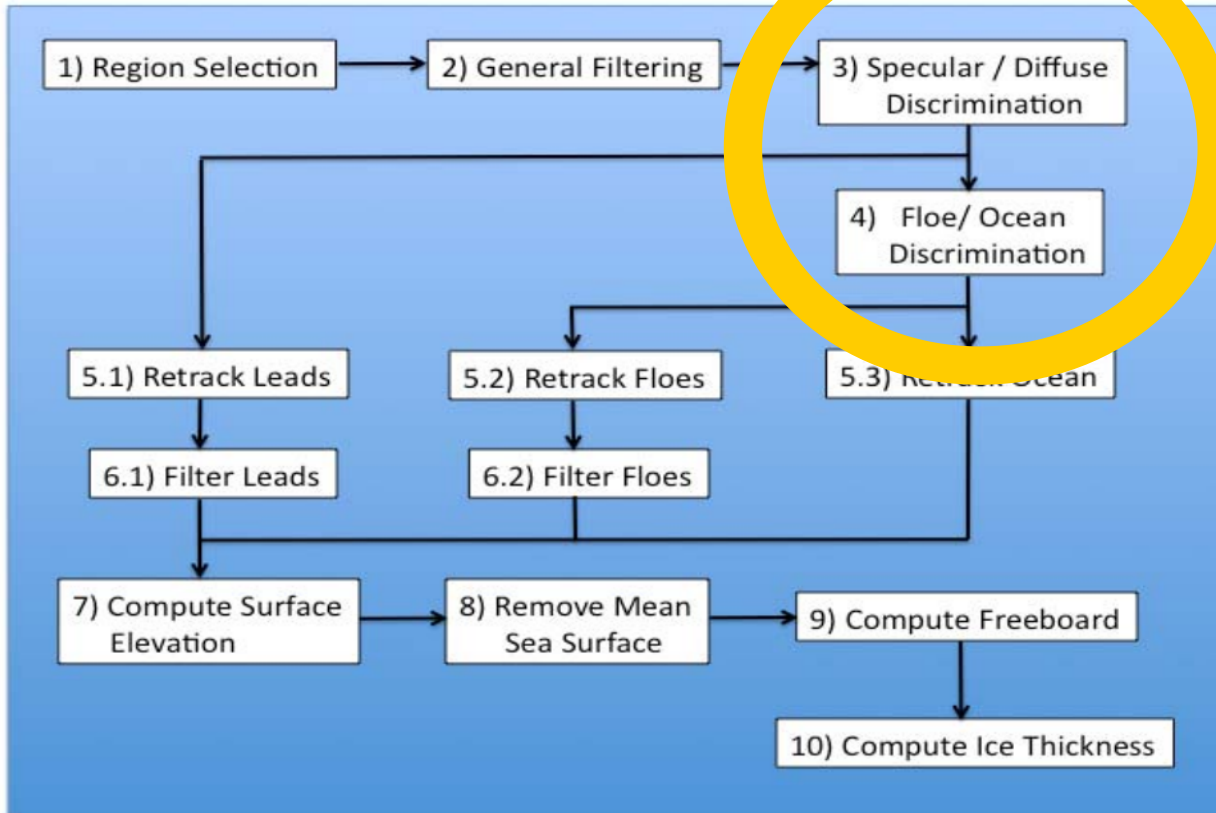

**Figure 2-2: Flow chart for the Sea Ice Thickness Processor**

Source: ESA CCI Sea Ice / ATBD









# What Louise said about waveforms!

- Waveform is the received power as a function of time (and time equals range)
- Different surfaces result into different waveforms.
- Lead → narrow and high
- Floe → diffuse

# Radar waveforms from different surfaces

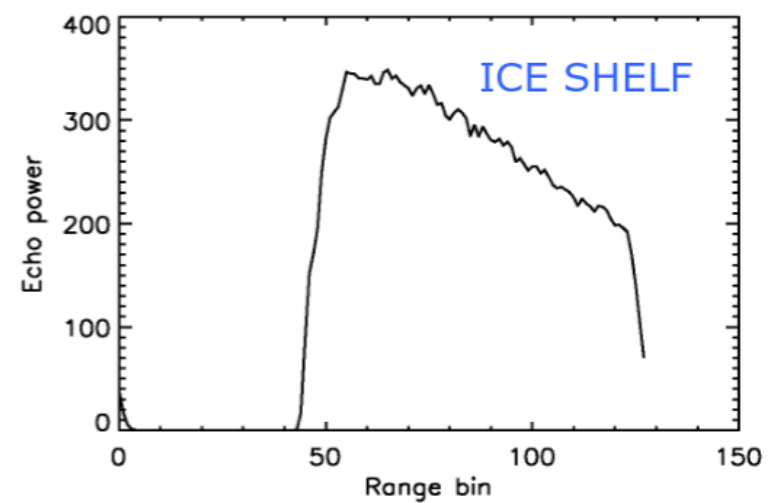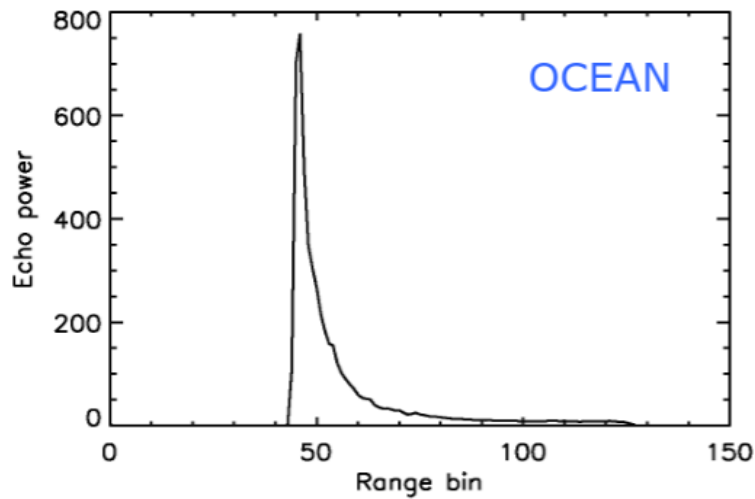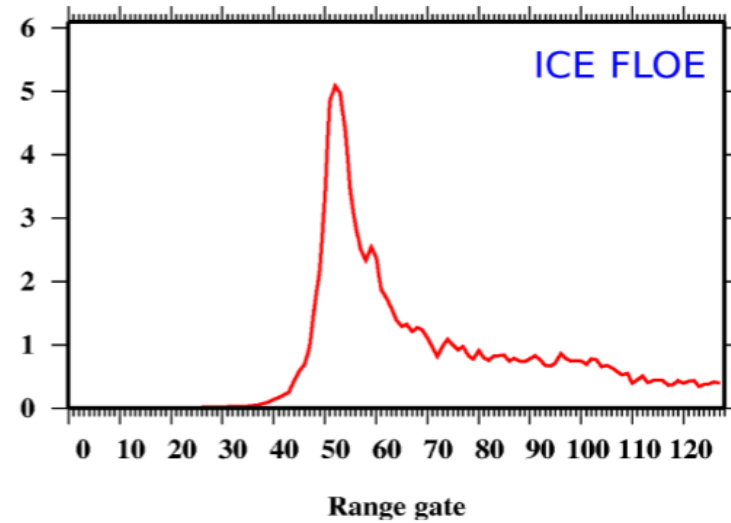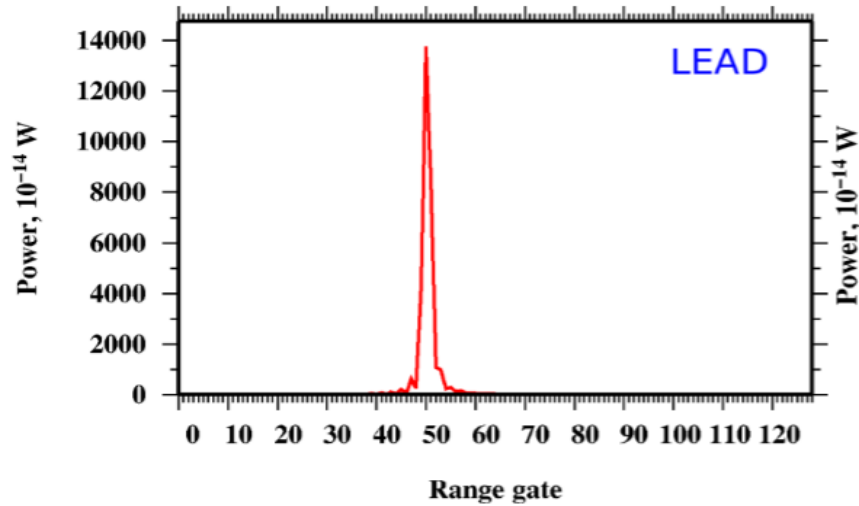




# Different lead detection schemes

- Pulse limited (ERS RA, Envisat RA-2):
  - Pulse Peakiness alone (Laxon 2003, “The SICCI way”)
- Delay-Doppler (CryoSat-2, Sentinel 3):
  - Pulse Peakiness and Stack Standard Deviation (Laxon 2013 “The UCL way”)
  - PP + SSD + Left & Right Pulse Peakiness (Ricker 2013, “The AWI way”)



# “The flowchart”

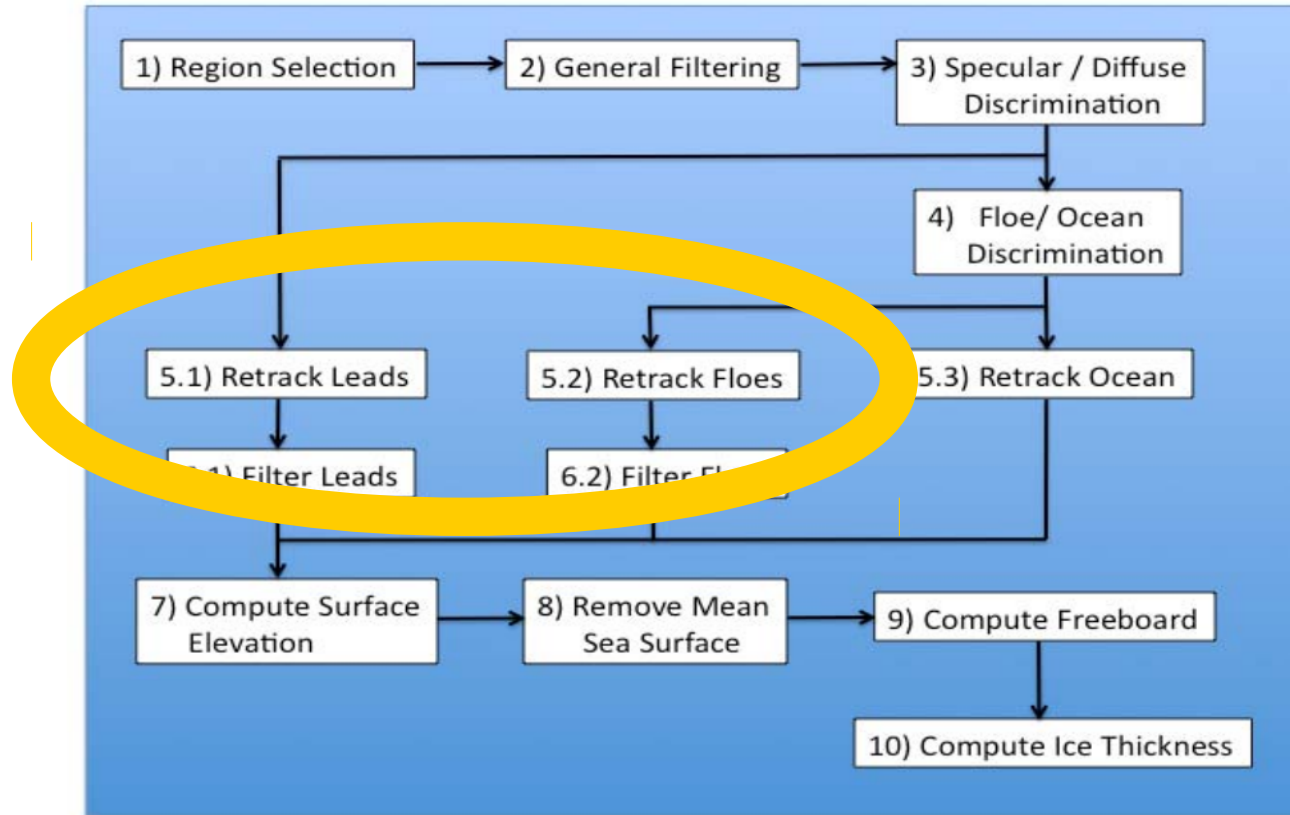

**Figure 2-2: Flow chart for the Sea Ice Thickness Processor**

Source: ESA CCI Sea Ice / ATBD




# Different retracking schemes

***R(waveform) → number***

- Unsurprisingly, there are several:
  - UCL, AWI, SICCI, Kurtz...
- No one best way to do this!
  - Very hard to validate
  - Accuracy, robustness, simplicity.
- Pick your poison, or make your own!



# “The flowchart”

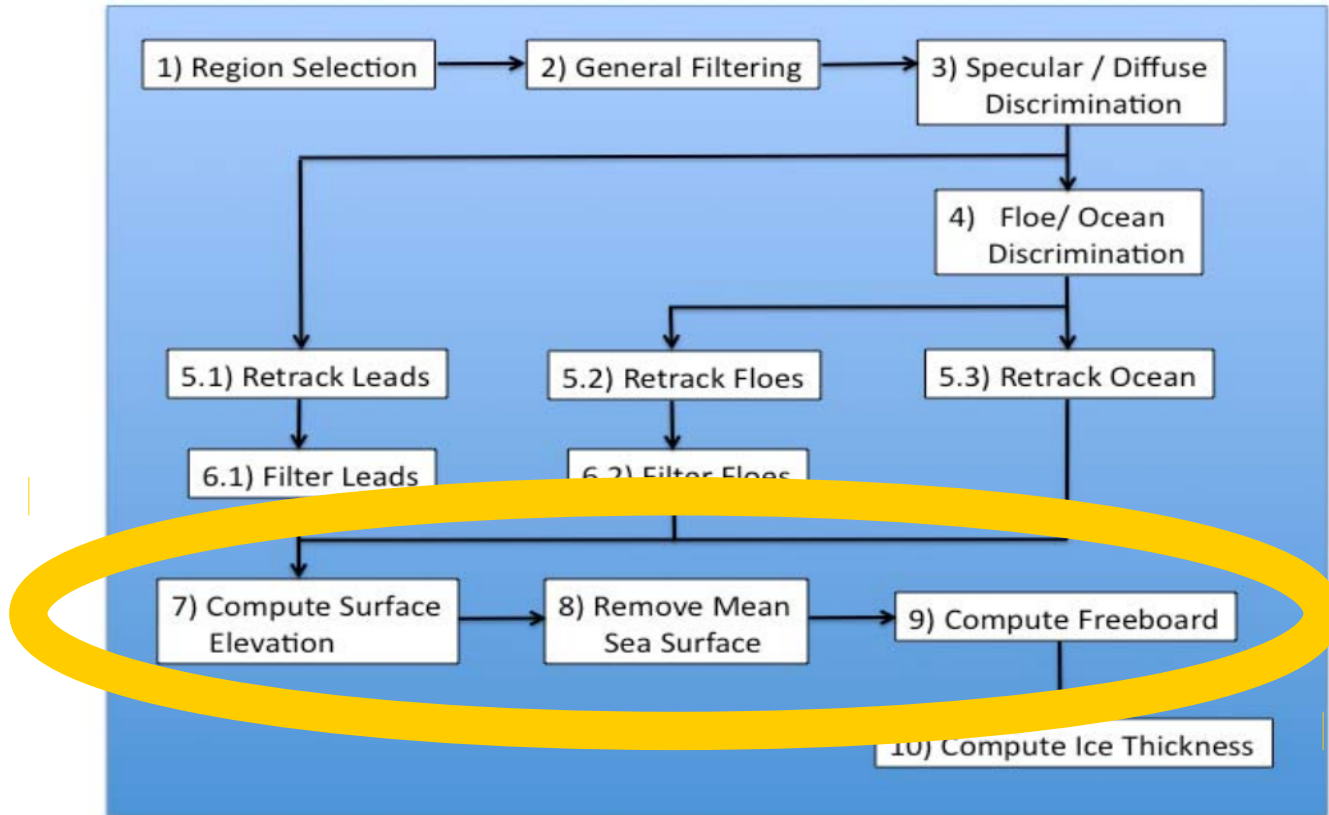


**Figure 2-2: Flow chart for the Sea Ice Thickness Processor**

Source: ESA CCI Sea Ice / ATBD



# From elevation to freeboard

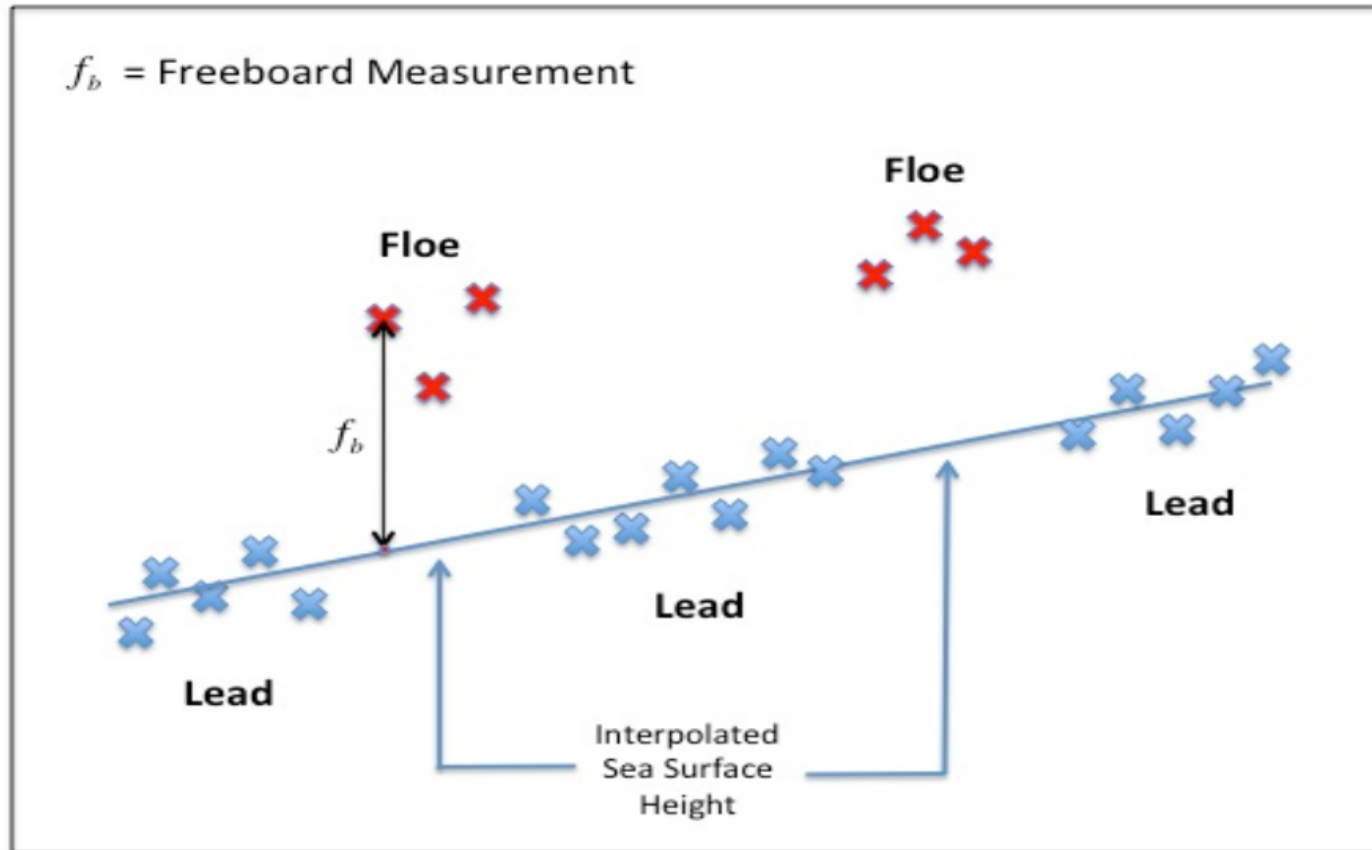


**Figure 2-6: Computation of Ice Freeboard**



# Mean Sea Surface Height

- The geoid used by altimeters is not the MSSH.
- The curvature of local sea level will interfere with lead elevation interpolation and thus must be removed!

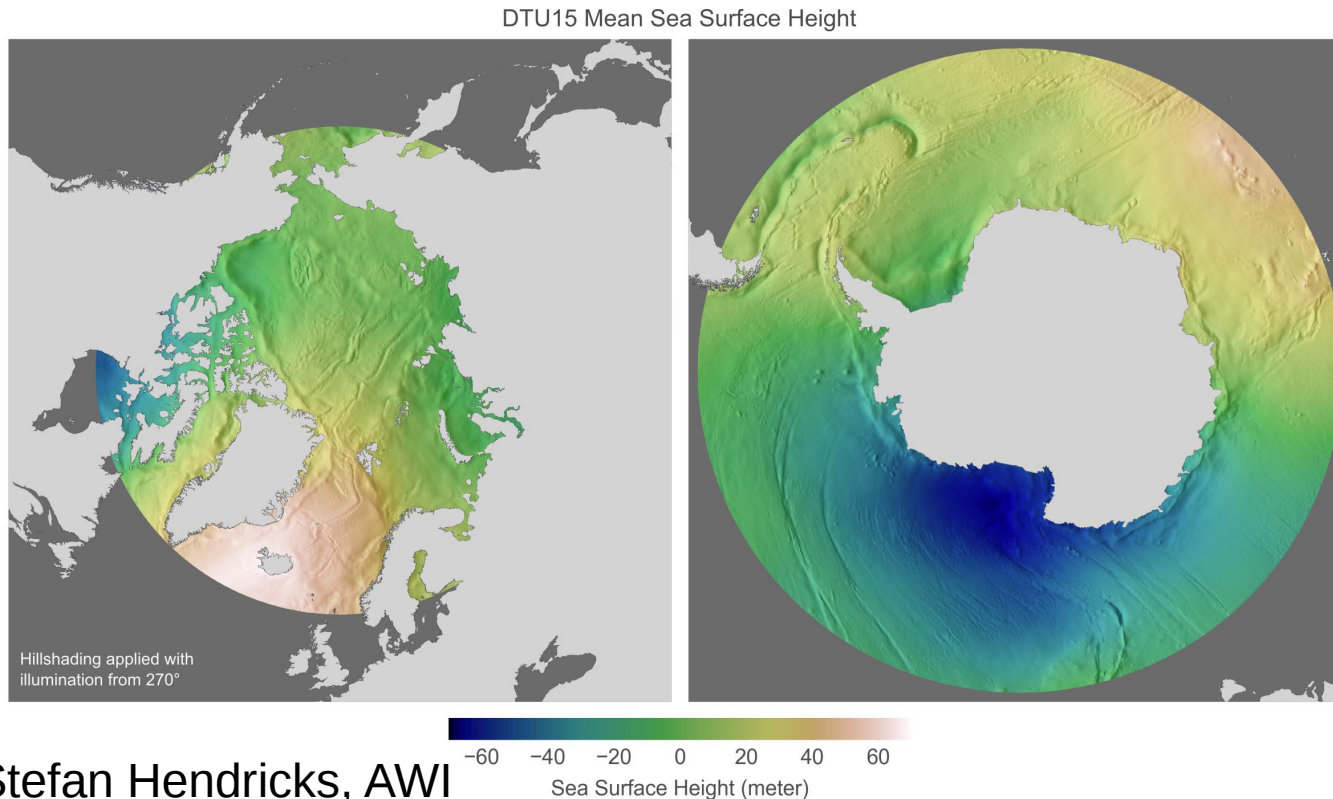





# Mean Sea Surface Height

- The geoid used by altimeters is not the MSSH.
- The curvature of local sea level will interfere with lead elevation interpolation and thus must be removed!





# From freeboard to sea ice thickness

$$z_i = \frac{z_s \rho_s + f_b \rho_w}{\rho_w - \rho_i}$$

Where:

$z_i$  = Ice thickness.


$z_s$  = Snow depth.

$f_b$  = Freeboard.

$\rho_s$  = Snow density.

$\rho_w$  = Density of sea water.

$\rho_i$  = Density of sea ice.

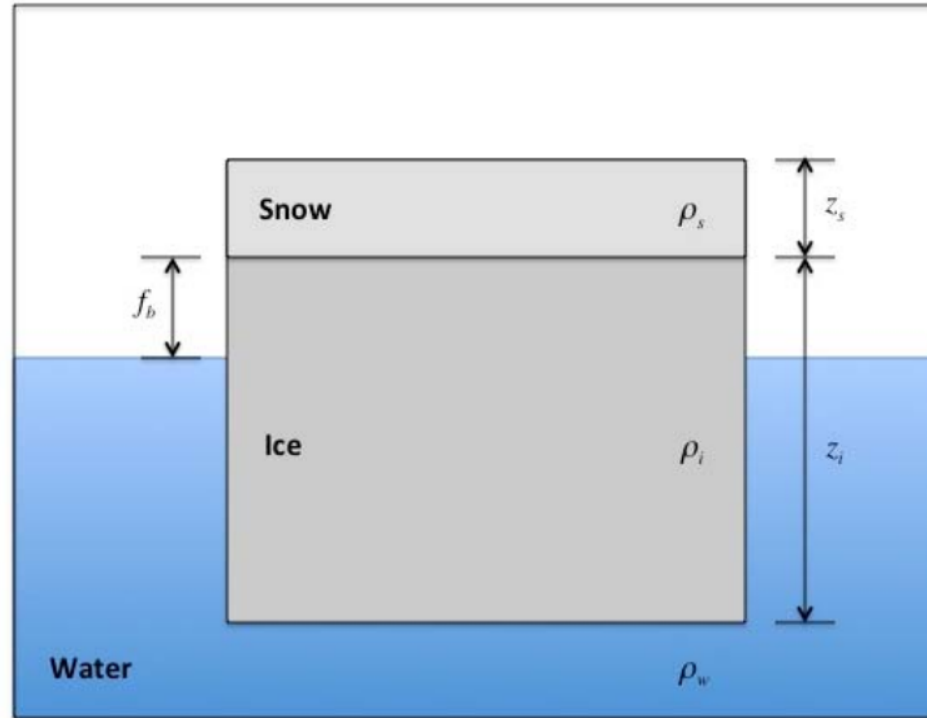




# Post-processing steps

- The signal is noisy → average!
- Grid into a convenient grid
  - There are thicknesses and thicknesses. Beware!
- Write into a convenient file format



# Sources of uncertainty


- Noise
- Preferential sampling
- Radar penetration
- Ice density
- Snow

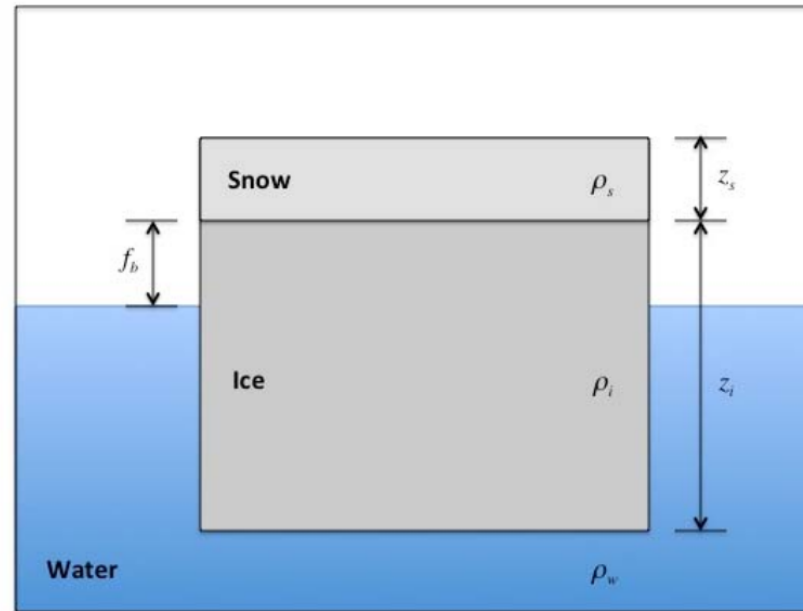



# Why does it only work in the winter?


- Melt ponds will interfere with lead / floe detection
- Radar penetration is ambiguous during melting.

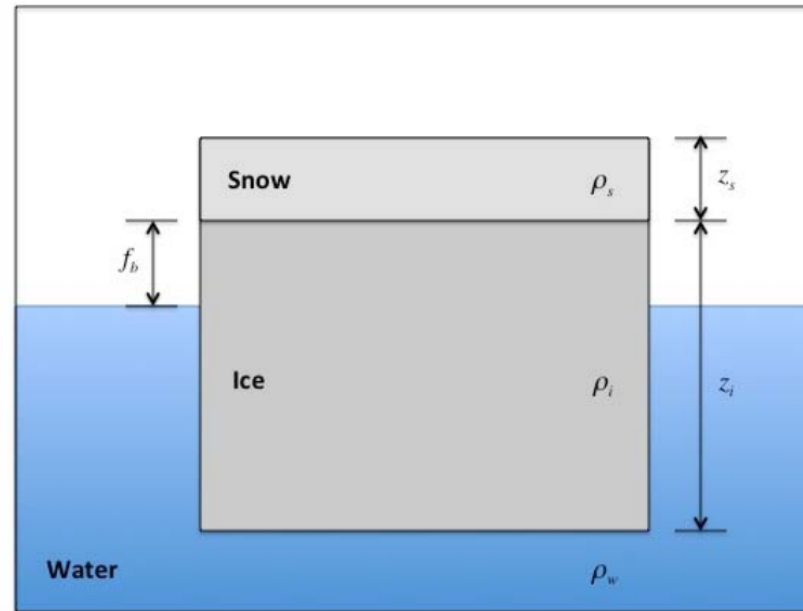



# Validation

LAXON ET AL.: CRYOSAT-2 SEA ICE THICKNESS AND VOLUME

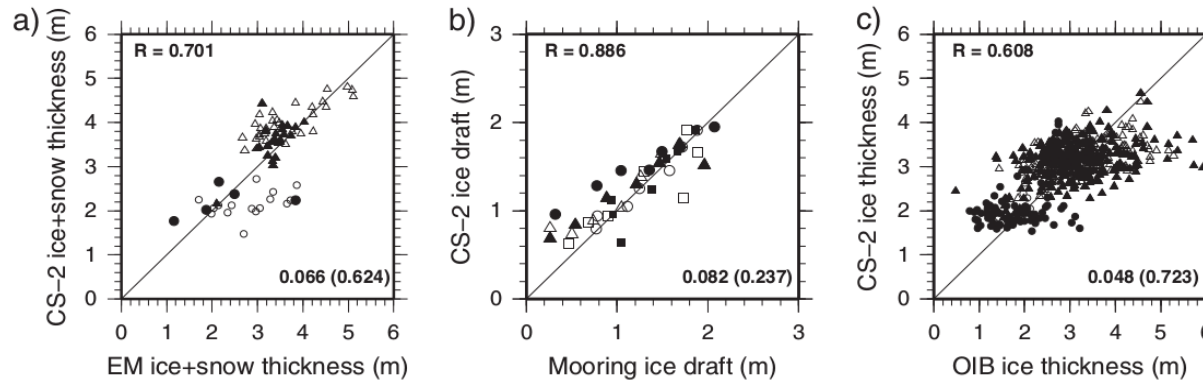


**Figure 2.** Validation of CryoSat sea ice thickness. (a) Comparison of Polar-5 aircraft EM and Cryosat-2 snow plus ice thickness over first year (**circle**) and multiyear (triangle) ice during April 2011 (open symbols) and 2012 (solid symbols). (b) Comparison of monthly average ice draft from Cryosat-2 within 200 km of the Beaufort Gyre Experiment Program Upward Looking Sonar Moorings (Mooring A: triangle, Mooring B: circle, Mooring D: square) for the period October 2010 to April 2011 and October 2011 to April 2012 (solid symbols). (c) Comparison of Operation IceBridge (OIB) aircraft laser and Cryosat-2 ice thicknesses over first year (**circle**) and multiyear (triangle) ice between 10 March 2011/12 and 9 April 2011/12 (solid symbols are data from 2012). Both aircraft comparisons were conducted by gridding CryoSat and the aircraft data onto a common (0.4 latitude by 4 longitude) grid and comparing those grid cells in which both data sets contained data. The locations of the in situ data sets are shown in Figure 1.





# What about the South?

CryoSat-2

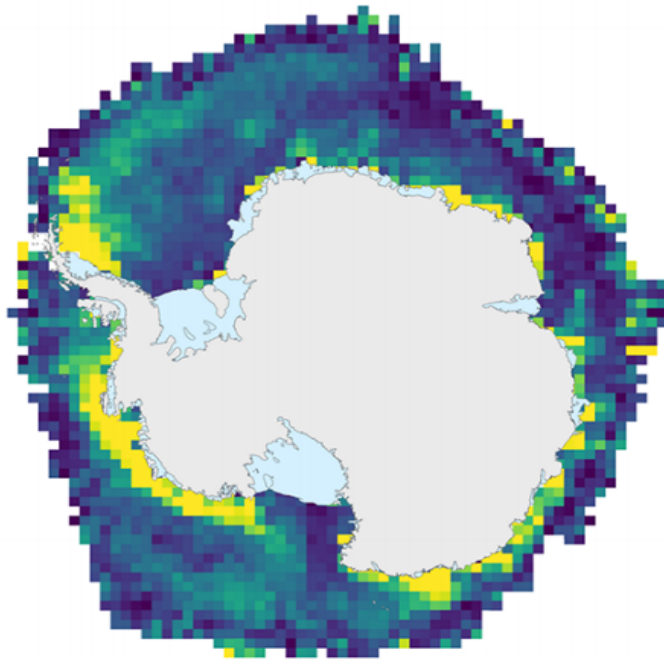

RA-2

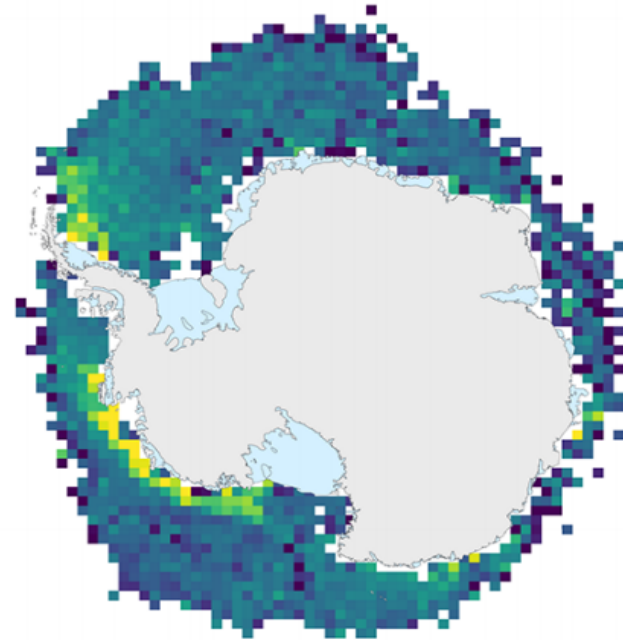

Schwegmann et al, TC2016, doi:10.5194/tc-10-1415-2016



# Pysiral

- A python package for altimeter sea ice thickness processing.
- Result of the ESA CCI Sea Ice project
- Open source!
- Ask me or Stefan Hendricks (AWI)





# L1B Preprocessing



CryoSat-2





Envisat

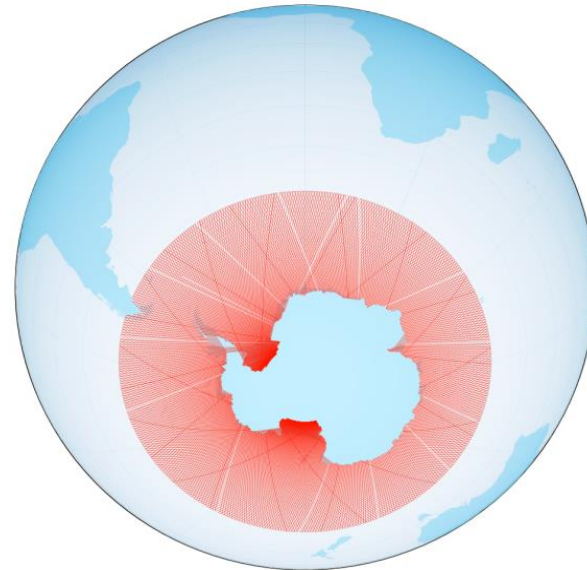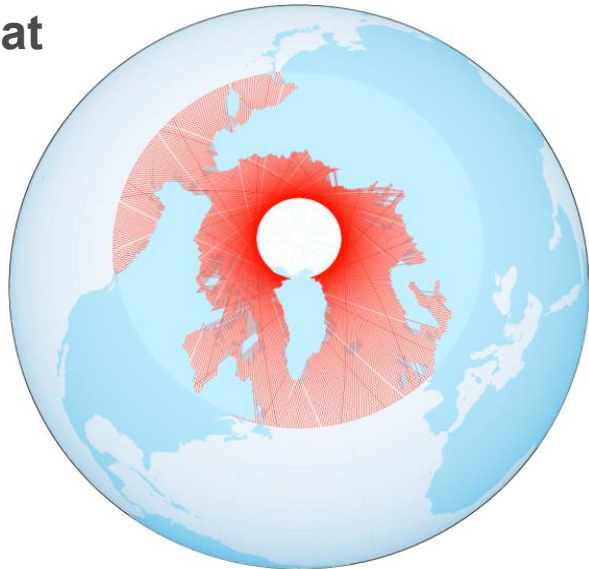

# L2 Processing

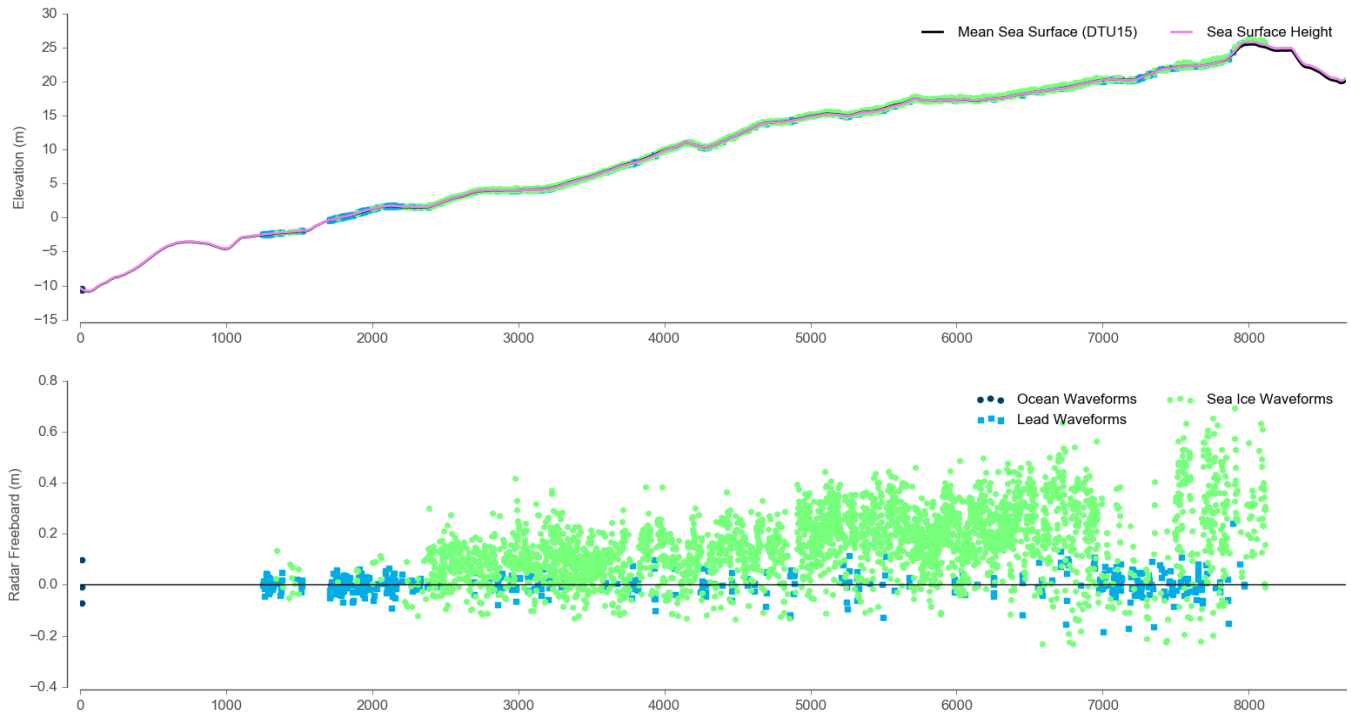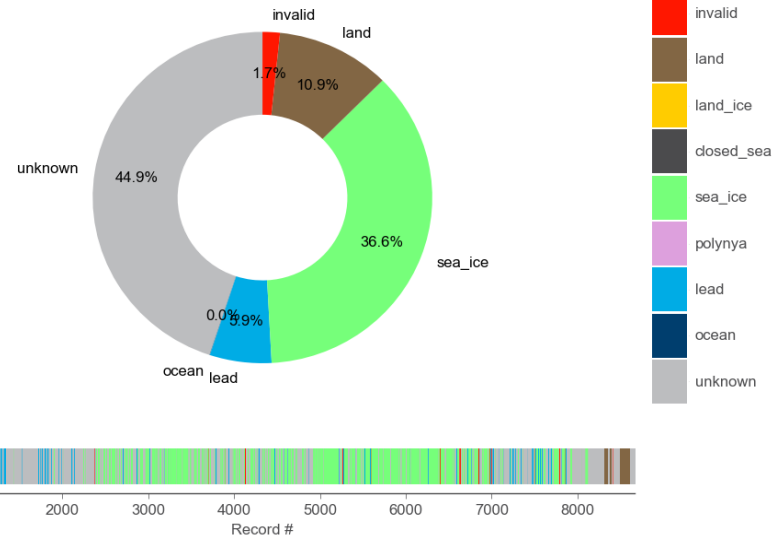

# L3 Processing

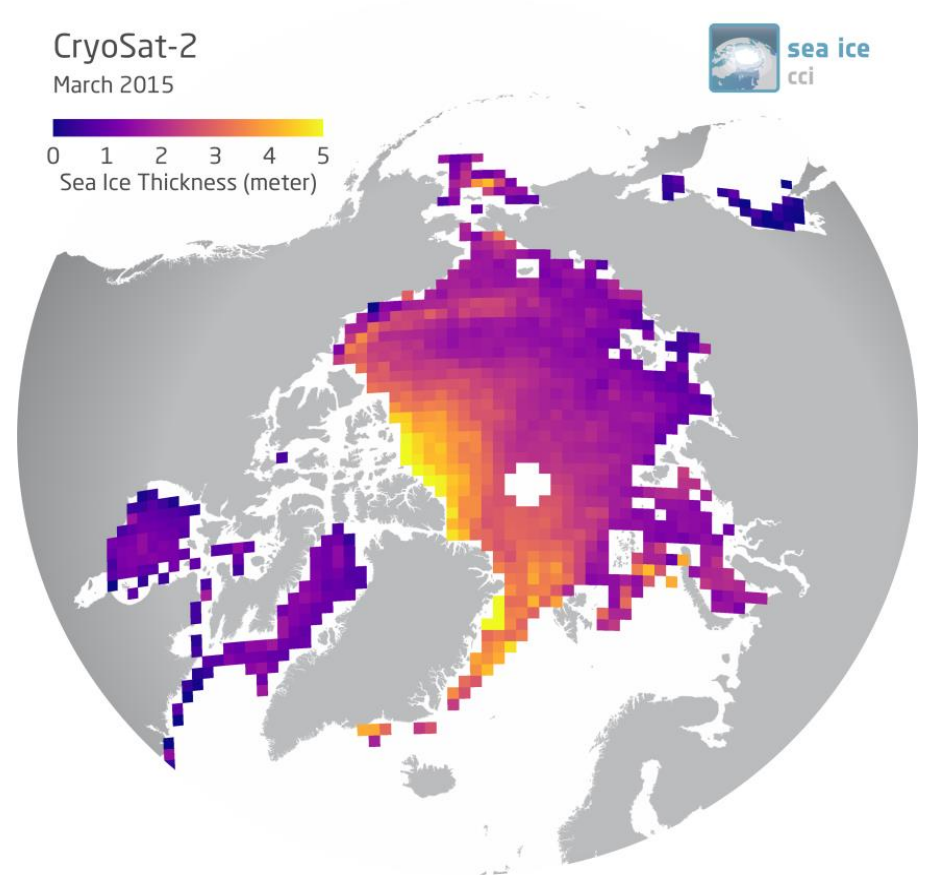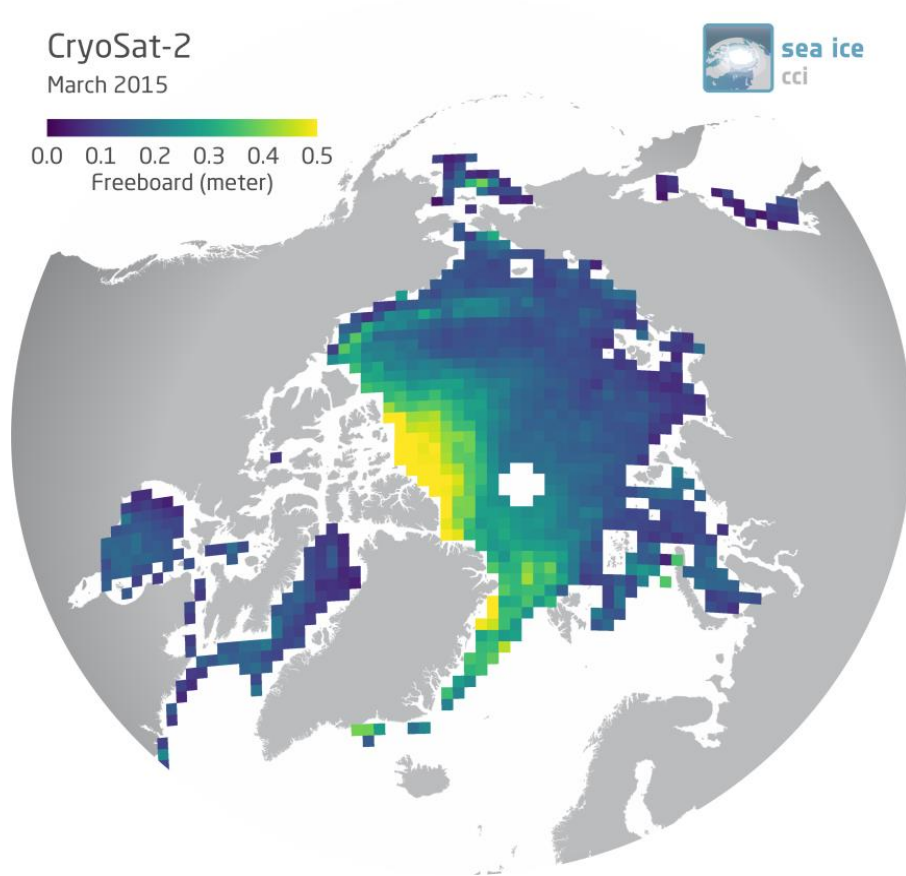



# Further reading (not complete!)

- CCI Sea Ice Algorithm Theoretical Basis Document (ATBD) “A cookbook for an SIT processor”
- Laxon et al.: “High interannual variability of sea ice thickness in the Arctic region”, Nature 2003
- Ricker et al.: Sensitivity of CryoSat-2 Arctic sea-ice freeboard and thickness on radar-waveform interpretation, The Cryosphere 2014.
- Kurtz et al.: An improved CryoSat-2 sea ice freeboard retrieval algorithm through the use of waveform fitting, The Cryosphere 2014.
- Tilling et al.: “Near-real-time Arctic sea ice thickness and volume from CryoSat-2” The Cryosphere, 2016



# Practical

- Two independent parts
  - UCL/CPOM processed SIT products
  - L1B → freeboard



FINNISH METEOROLOGICAL INSTITUTE

[www.fmi.fi](http://www.fmi.fi)

